


# Cylindrical Series (Male-Male Combination) Insulators

**Cylindrical Series (Male-Male Combination) Standoff insulators available in both Metric & UNC Threads & in variety of heights & inserts.**

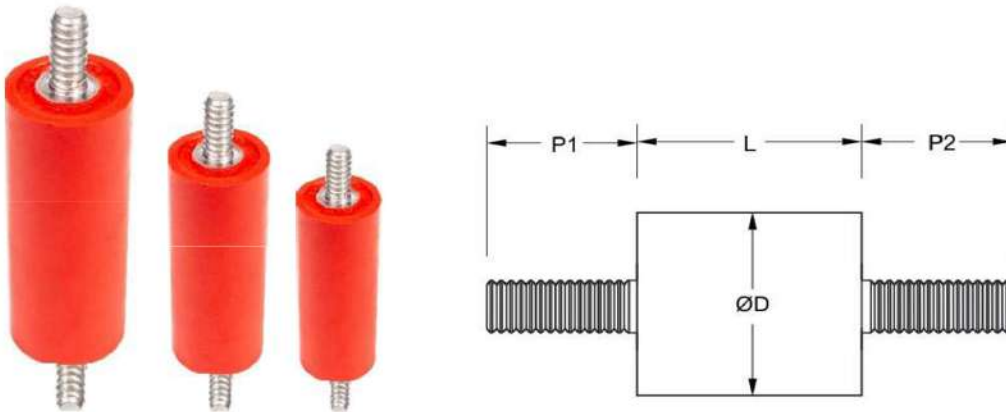

**Our Insulators are moulded from a flame retardant and track resistance glass reinforced Thermoset Polyester compound recognized to use for current carrying devices under UL Material Recognition No. E249670.**

- **Glow Wire Test - 960 °C**
- **Self-Extinguishing, UL 94 Vo Rated**
- **Non-Hygroscopic Material**
- **Halogen Free**
- **Operating Temperature range from (-) 40°C to 130°C.**

| Part No.            | Dimensions      |    |       |       | Nominal Voltage<br>(AC/DC) |
|---------------------|-----------------|----|-------|-------|----------------------------|
|                     | $\varnothing D$ | L  | P1    | P2    |                            |
|                     | mm              | mm | mm    | mm    |                            |
| CY10.10-M3.05-M3.05 | 10              | 10 | M3X5  | M3X5  | 400/500                    |
| CY10.10-M3.05-M3.10 | 10              | 10 | M3X5  | M3X10 | 400/500                    |
| CY10.10-M3.08-M3.08 | 10              | 10 | M3X8  | M3X8  | 400/500                    |
| CY10.10-M3.10-M3.10 | 10              | 10 | M3X10 | M3X10 | 400/500                    |
| CY14.14-M4.10-M4.10 | 14              | 14 | M4X10 | M4X10 | 500/700                    |
| CY14.14-M5.10-M5.10 | 14              | 14 | M5X10 | M5X10 | 500/700                    |
| CY14.14-M6.10-M6.10 | 14              | 14 | M6X10 | M6X10 | 500/700                    |
| CY14.14-M6.10-M6.15 | 14              | 14 | M6X10 | M6X15 | 500/700                    |
| CY14.14-M6.15-M6.15 | 14              | 14 | M6X15 | M6X15 | 500/700                    |
| CY20.18-M6.07-M6.15 | 20              | 18 | M6X7  | M6X15 | 700/900                    |
| CY20.18-M6.15-M6.15 | 20              | 18 | M6X15 | M6X15 | 700/900                    |
| CY20.18-M8.08-M8.25 | 20              | 18 | M8X8  | M8X25 | 700/900                    |
| CY20.18-M8.20-M8.20 | 20              | 18 | M8X20 | M8X20 | 700/900                    |

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.