


WT Type Standoff Insulators

WT type standoff insulators available in both Metric & UNC Threads & in variety of heights & inserts, Male-Female & Male-Male Inserts combination.

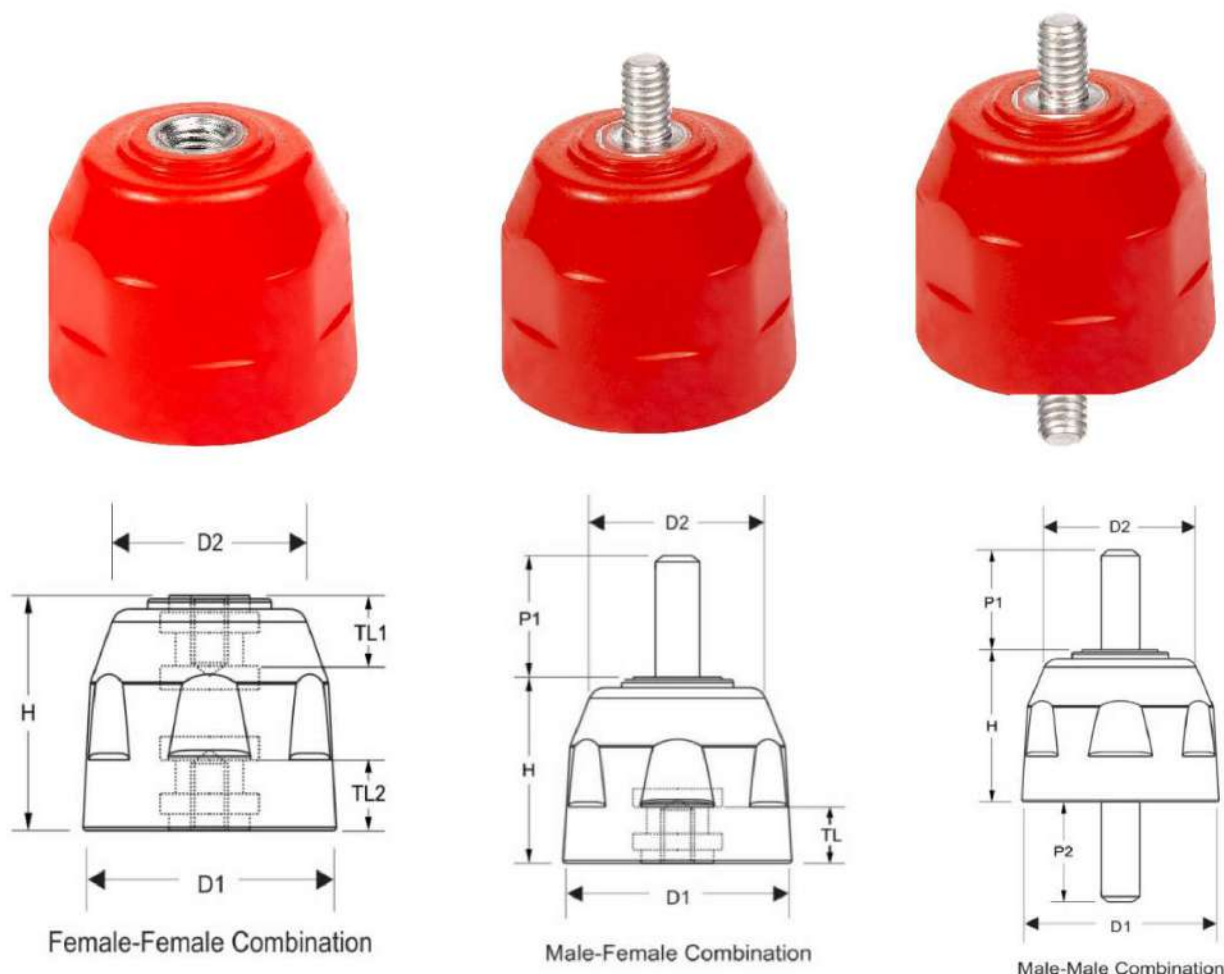

Our Insulators are moulded from a flame retardant and track resistance glass reinforced Thermoset Polyester compound recognized to use for current carrying devices under UL Material Recognition No. E249670 & products are itself certified under UL Product Recognition no. E314972.

- **Glow Wire Test - 960 °C**
- **Self-Extinguishing, UL 94 Vo Rated**
- **Non-Hygroscopic Material**
- **Halogen Free**
- **Operating Temperature range from (-) 40°C to 130°C.**

WT Female-Female Series

Product Code	Dimensions (mm)				
	H	TL1	TL2	D1	D2
	(mm)				
WT0515 (M5)	15	M05 x 3.5	M05 x 3.5	16	14
WT0626 (M6)	26	M06 x 7.5	M06 x 7	26	19
WT0630 (M6)	30	M06 x 09	M06 x 09	30	24
WT0830 (M8)	30	M08 x 09	M08 x 09	30	24

WT0635 (M6)	35	M06 x 12	M06 x 12	41	31
WT0835 (M8)	35	M08 x 12	M08 x 12	41	31
WT1035 (M10)	35	M10 x 12	M10 x 12	41	31
WT0840 (MB)	40	M08 x 12	M08 x 12	40	30
WT1040 (M10)	40	M10 x 10	M10 x 12	40	30
WT1050 (M10)	50	M10 x 17	M10 x 17	50	35

WT Male-Female Series					
Product Code	Dimensions				
	H	P1	TL	D1	D2
	(mm)				
WT0515-M0506.F0503	15	M05 x 06	M05 x 3.5	16	14
WT0626-M0610.F0607	26	M06 x 10	M06 x 7.0	26	19
WT0630-M0610.F0609	30	M06 x 10	M06 x 09	30	24
WT0830-M0810.F0809	30	M08 x 10	M08 x 09	30	24
WT0635-M0615.F0612	35	M06 x 15	M06 x 12	41	31
WT0835-M0815.F0812	35	M08 x 15	M08 x 12	41	31
WT1035-M1015.F1012	35	M10 x 15	M10 x 12	41	31
WT0840-M0815.F0812	40	M08 x 15	M08 x 12	40	30
WT1040-M1015.F1012	40	M10 x 15	M10 x 12	40	30
WT1050-M1020.F1017	50	M10 x 20	M10 x 17	50	35

WT Male-Male Series					
Product Code	Dimensions				
	H	P1	P2	D1	D2
	(mm)				
WT0515-M0506.M0506	15	M05 x 06	M05 x 06	16	14
WT0626-M0610.M0610	26	M06 x 10	M06 x 10	26	19
WT0630-M0610.M0610	30	M06 x 10	M06 x 10	30	24
WT0830-M0810.M0810	30	M08 x 10	M08 x 10	30	24
WT0635-M0615.M0615	35	M06 x 15	M06 x 15	41	31
WT0835-M0815.M0815	35	M08 x 15	M08 x 15	41	31
WT1035-M1015.M1015	35	M10 x 15	M10 x 15	41	31
WT0840-M0815.M0815	40	M08 x 15	M08 x 15	40	30
WT1040-M1015.M1015	40	M10 x 15	M10 x 15	40	30
WT1050-M1015.M1015	40	M10 x 15	M10 x 15	50	35

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.