
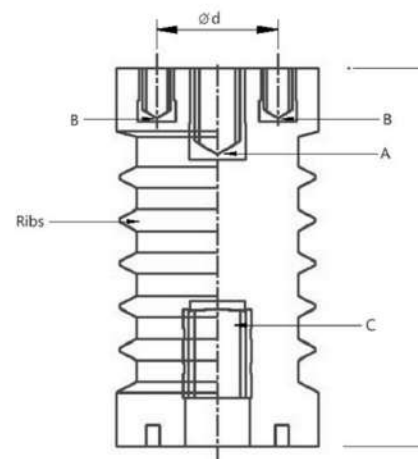


Medium Voltage Insulators

We offer wide range of Medium Voltage standoff insulators for Indoor Application & available in both Metric & UNC Threads, in variety of heights & different types of insert materials.

Our Insulators are manufactured and tested as per IS/BS/IEC and other international standards to suit various testing requirements in range of 3.3 kV to 33 KV system voltage.



Part Code	Height (mm)	Voltage Rating (KV)	Ribs	Creepage (mm)	Ø D(mm)	Ø d (mm)	Inserts		
							A	B	C
MV 5035	35	1.6	4	48	50	25	-	M08 X 15	C = B
MV7535	35	1.6	4	67	75	30	-	M10 X 15	C = B
MV 6040	40	3.5	1	55	60	36	M10 X 15	M08 X 12	M10 X 15
MV 4050	50	3.5	1	55	40	-	M10 X 15	-	M10 X 15
MV 5050	50	3.5	4	65	50	25	-	M08 X 20	C = B
MV 7550	50	3.5	4	82	75	30	-	M10 X 20	C = B
MV 5560	60	5.5	1	78	55	28	-	M08 X 15	C = B
MV 606560	60	5.5	2	90	60/65	36	M12 X 20	M08 X 20	M12 X 20
MV 859060	60	5.5	2	90	85/90	60	M16 X 20	M10 X 20	M16 X 20
MV6075	75	6.8	2	112	60	36	M10 X 20	M06 X 15	M12 X 25
PDMV 6075	75	6.8	2	112	60	36	M10 X 20	M08 X 15	M12 X 25
MV 9580	80	6.8	1	92	90	55	-	M10 X 20	M16 X 30
MV 7590	90	8.5	3	132	75	40	M10 X 20	2 X M08 X	C = A,B
MV 6090	90	8.5	3	140	60	36	M10 X 20	M06 X 15	M12 X 25
PDMV 6090	90	8.5	3	140	60	36	M10 X 20	M08 X 15	M12 X 25
MV 9011082	110	12	4	209	82/90	40	-	M10 X 15	M12 X 20
MV 60130	130	12	5	200	60	36	M12 X 25	M06 X 15	M16 X 35
PDMV 60130	130	12	5	200	60	36	M12 X 25	M08 X 15	M16 X 35
MV 75130	130	12	5	215	75	45	M16 X 35	M10 X 20	M20 X 35
MV 75130/2	130	12	5	215	75	45	M12 X 35	M08 X 20	A=B

MV 75130/7	130	12	5	256	75	45	M16 X 35	M10 X 20	M20 X 40
MV 90130	130	12	7	372	90	36	-	M16 X 35	M20 X 40
MV 8614580	145	16	7	260	80/86	40	-	M10 X 15	M12 X 20
MV 90150	150	16	7	392	90	36	-	M16 X 35	M20 X 40
MV 70210	210	22	9	285	70	36	M10 X 25	M06 X 15	M16 X 55
PDMV 70210	210	22	9	285	70	36	M10 X 25	M08 X 15	M16 X 55
MV 70210/2	210	22	9	285	70	36	M12 X 25	M08 X 20	A=B
MV 80300	300	33	12	450	80	36	M10 X 25	M06 X 15	M16 X 75
PDMV 80300	300	33	12	450	80	36	M10 X 25	M08 X 15	M16 X 75
MV 95300	300	33	12	630	95	46	M16 X 55	M10 X 20	M22 X 65

- All Dimensions are in mm only.
- Tolerance is applicable as per DIN Standard 2768.